



STANDARD PRODUCT DATA SHEET No 2. FOAM PIGS - MEDIUM & HEAVY DENSITY FOAM




Description

Bare Foam Pig c/w Rear Driving Coating

Applications

Drying (Long Runs)
Water removal
Pipeline Proving

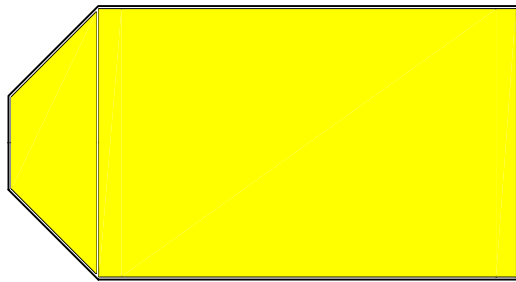


Description

PU Coated Foam pig

Applications

Product removal
Water removal
Chemical Batching

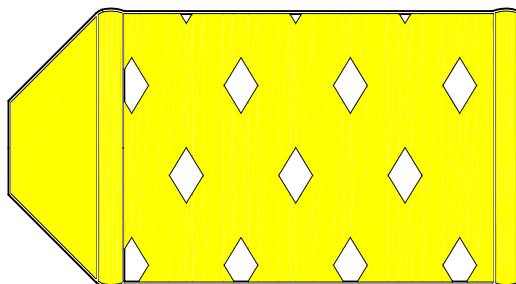


Description

PU Criss Cross Coated Foam Pig

Applications

Flooding \ Venting
Dewatering
Medium Cleaning

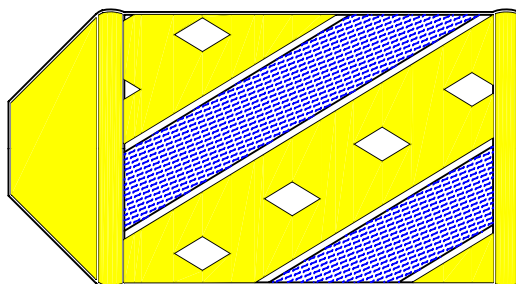

Description

Wire Brush PU Coated Foam Pig
(4 Grades of Brush available - see sheet 4)

Applications

Removal of scale and rust deposits

General Information

Pigs available to suit the entire Pipeline Diameter range between 1/4" & 56".

Various optional extras are available to suit Foam pigs i.e. Transmitter Housings, Gauging Plates, and Towing Loops (see sheet 3 for details)

Foam Pigs are suitable for traversing all bends, ball /gate/check valves, full diameter barred tees (Please consult our technical sales department with pigging requirements)

Heavy Density Foam suitable for longer pipeline runs (please consult our technical sales department with your pipeline specification).

Propipe Limited, Prospect Way, Park View Industrial Estate, Hartlepool, England. TS25 1UD

Tel : +44 (0)1429 890 190 Fax : +44 (0)1429 890 198