




STANDARD PRODUCT DATA SHEET No 1. FOAM PIGS - LIGHT DENSITY FOAM

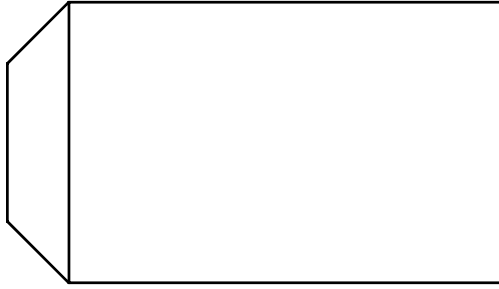


Description

Bare Foam Pig (with or without Rear Coating)

Applications

Proving
Light Swabbing

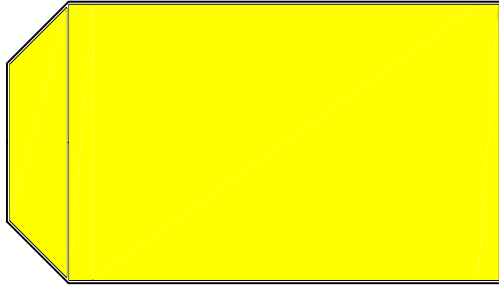


Description

PU Coated Foam pig

Applications

Product removal
Water removal

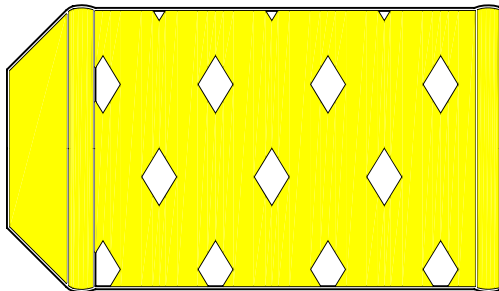


Description

PU Criss Cross Coated Foam Pig

Applications

Flooding
Dewatering
Light Cleaning

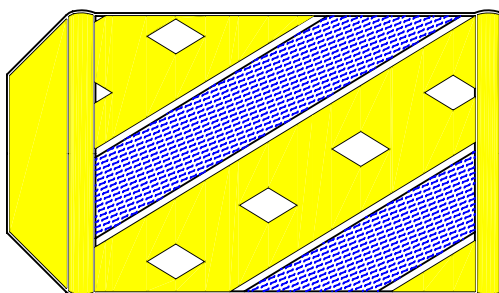

Description

Silicone Band PU Coated Foam Pig

Applications

Removal of light scale, loose rust deposits
and line polishing.

General Information

Pigs available to suit the entire Pipeline Diameter range between 1/4" & 56".

Various optional extras are available to suit Foam pigs i.e. Transmitter Housings, Gauging Plates, and Towing Loops (see sheet 3 for details)

Foam Pigs are suitable for traversing all bends, ball /gate/check valves, full diameter barred tees (Please consult our technical sales department with pigging requirements)

Heavy Density Foam suitable for longer pipeline runs (please consult our technical sales department with your pipeline specification).